


### 1 Find Mounting Location

Mount device horizontally with the label side up, without any metal obstructions.

- No Metal obstructions
- Mount as high in the dash as possible
- Mount at least 12 inches away from the radio and speakers.
- DO NOT SECURE THE DEVICE**

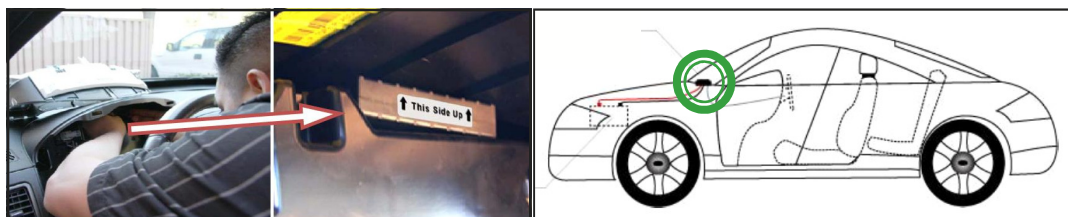


### 2 Device Connections

-The 3 wire install connections are mandatory. The device will not operate without these connections.

-The T2C **YELLOW**, **GREEN** and **BROWN** wires are outputs. When connected using a relay, can drive optional features.

-The T2C **ORANGE** and **BLUE** wires are inputs. When connected using a relay, can drive optional features.

### 3 Wire Install + Optional Features

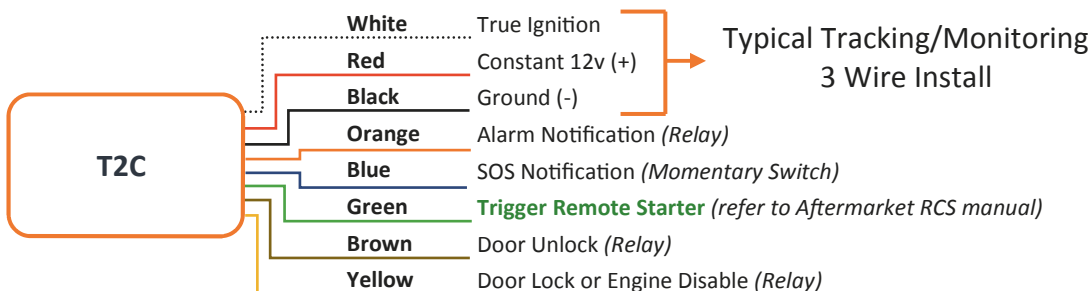

### 3 Check Signal

- Confirm green GPS lock & amber cellular network lights are solid
- Vehicle must be outdoors to activate GPS signal

**Note: Cellular & GPS Lock may take Several minutes**



### 4 Test

- Log In to your dealer account
- Enter the device ESN
- Test all installed features
- Assure red/green timer is displaying on "start" bar to confirm true ignition connection

**+1 306.979.8900** | [About Us](#) | [Media Buzz](#) | [Blog](#)

CUSTOMER LOGIN

DEALER LOGIN

### No Dealer Account?

Create one at [www.Text2Car.com](http://www.Text2Car.com)  
Or, call the head office and have technical support test all installed features

### 5 Secure Device

- Secure the device to the chosen mounting location using double sided tape or tie wires.
- White label side up

#### Please Note:

On occasion initial activation to the system may require up to several hours to complete

**TEXT2CAR.COM**  
**306.979.8900**  
**info@text2car.com**

